




# LG VX4500 Speaker Replacement

Written By: David Foster

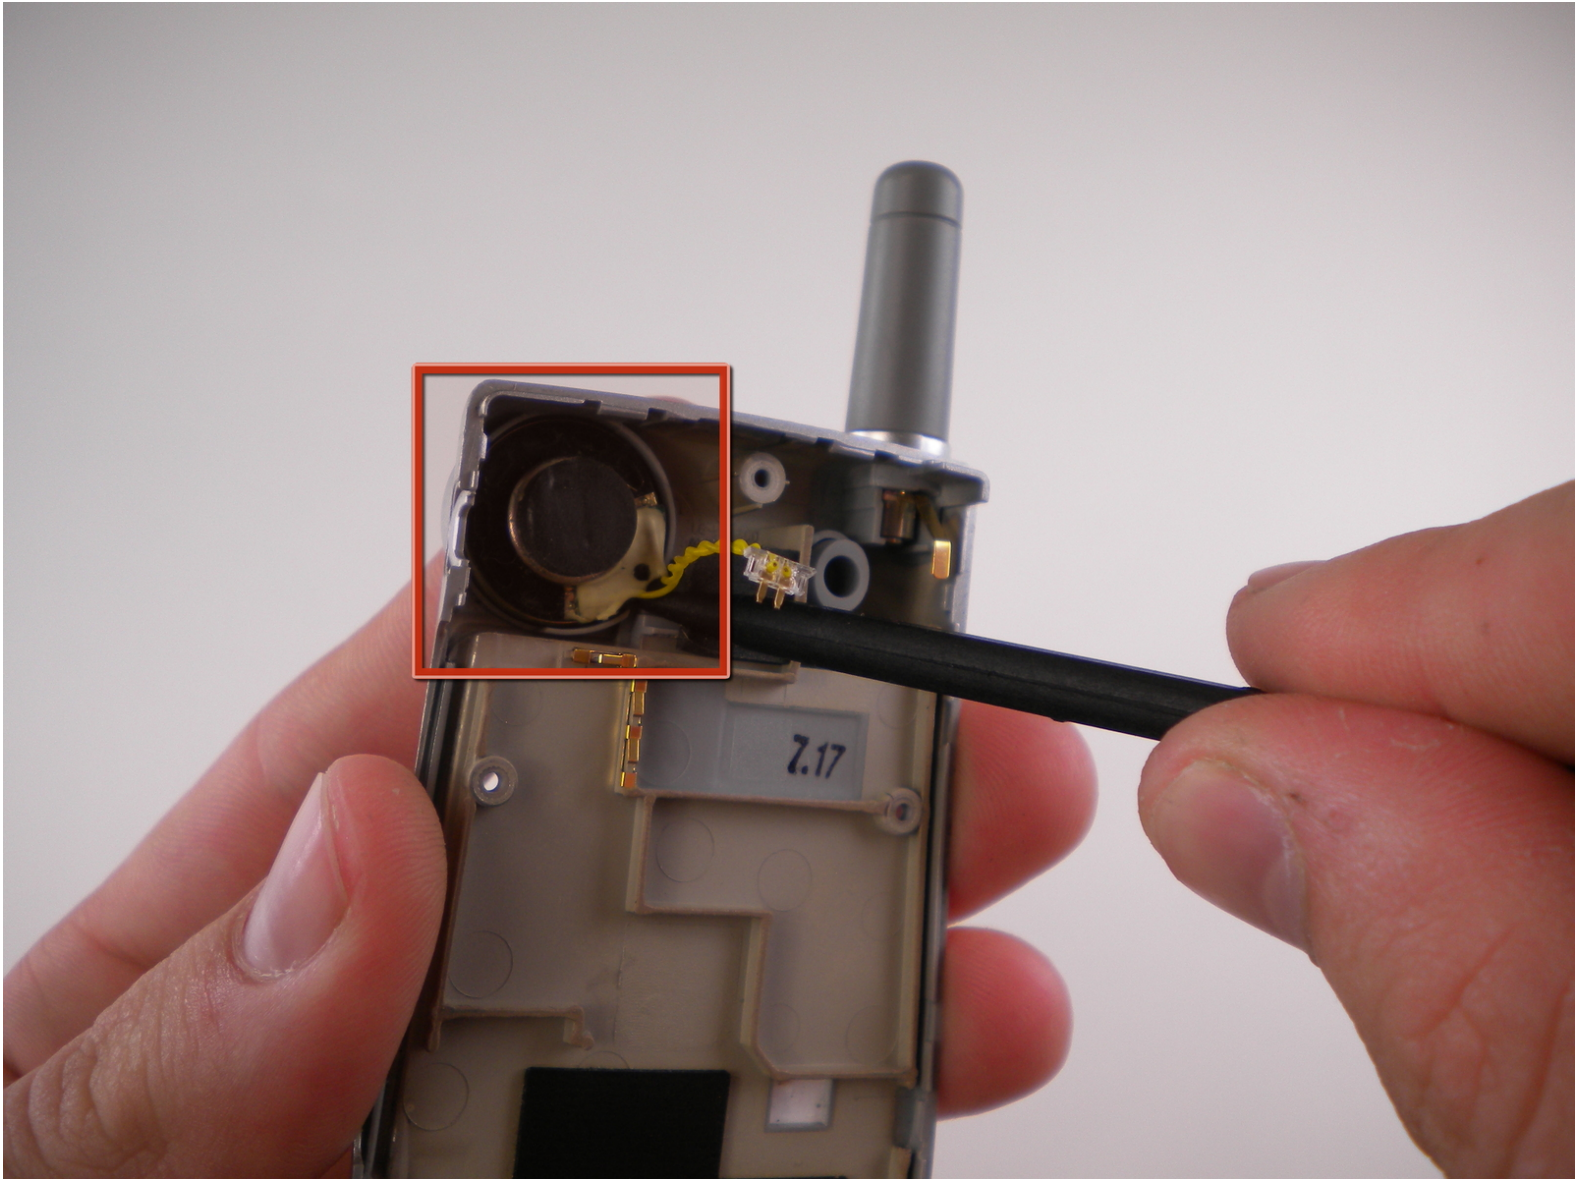

## INTRODUCTION

Replacing the speaker.

---



### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [Spudger](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Battery



- Turn the closed phone so that the back panel is facing you.
- Press down and forward firmly on the gray tab in the middle of the phone.

## Step 2



- Now just lift up on the battery and remove it from the phone.




## Step 3 — Rear Cover



- Remove the rubber grommet using a Spudger.


## Step 4

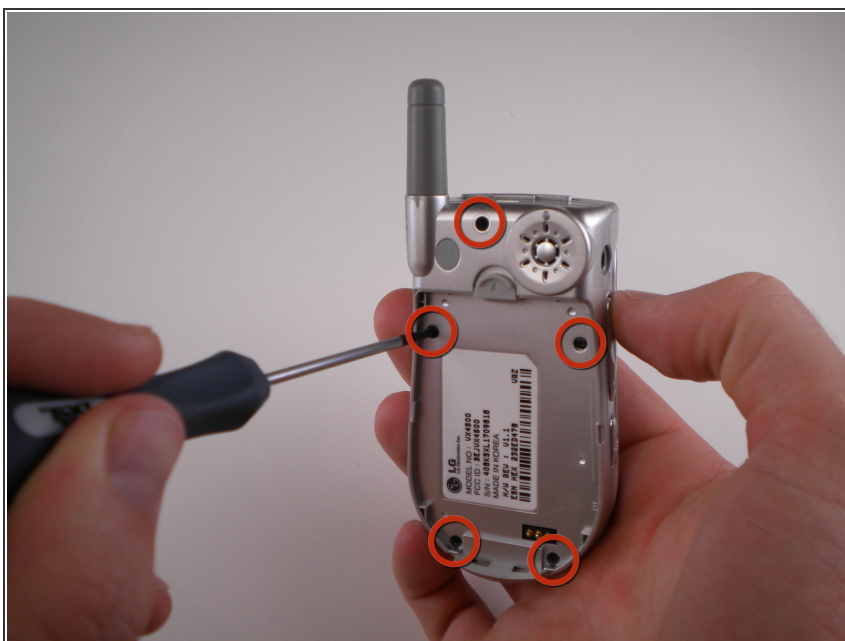

- ⚠ Be sure not to lose the screws. They are small!
- Remove the five screws using a Phillips #00 Screwdriver.

## Step 5



 When removing back cover, be careful not to break the speaker wires.

- Using an iPod Opening Tool, carefully pry off the back cover.
- Using Tweezers, gently pull speaker wires out.



## Step 6



- Separate the two halves.




## Step 7 — Speaker

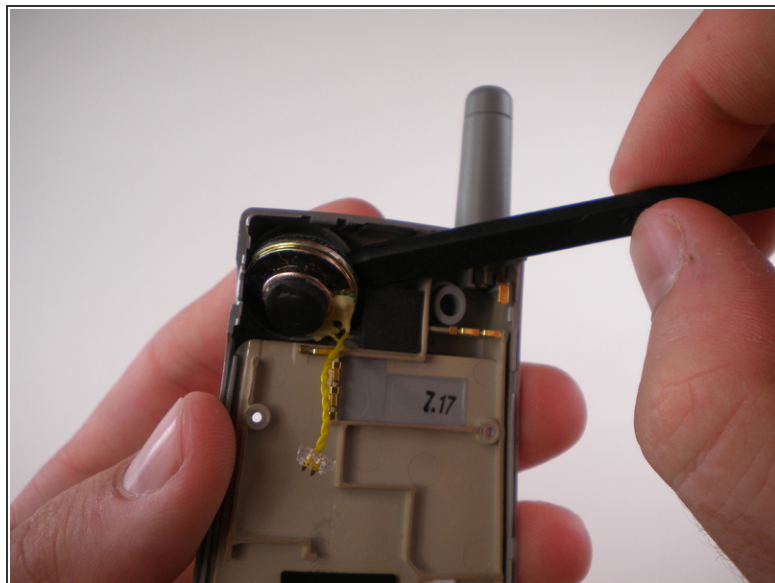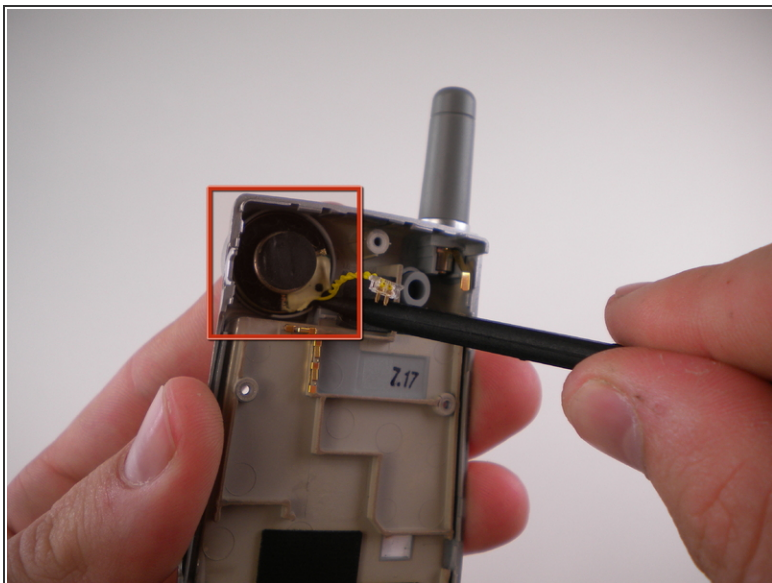

- Take top half of phone and pry up speaker using the Spudger.

## Step 8

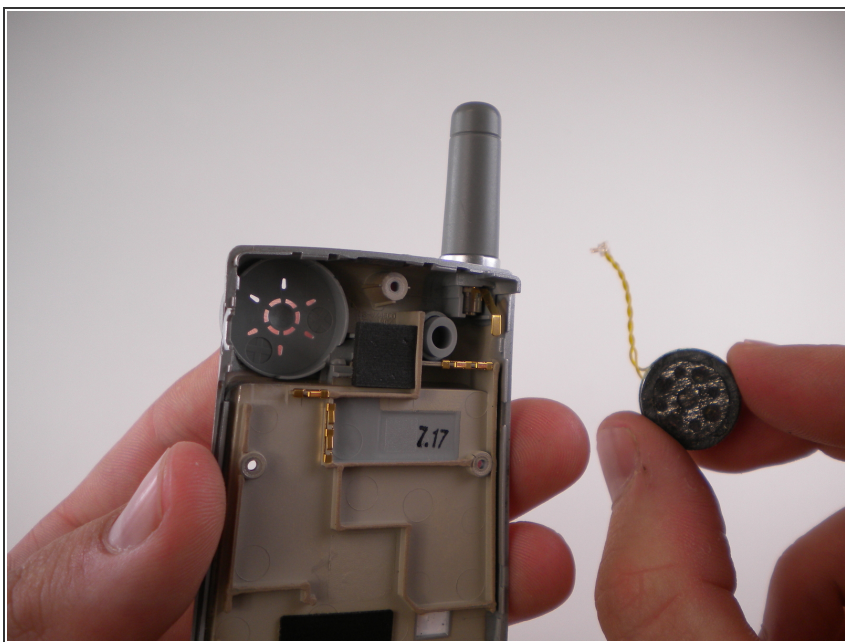

- Lift out speaker.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 03:39:10 AM.

